
AIRCOM

Dust & Fume collector with fully automated reverse pulse cleaning





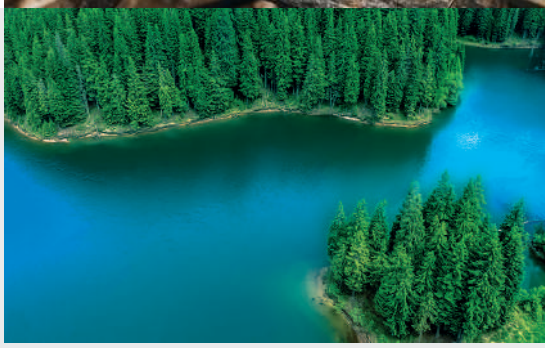

AIRCOM

AIRCOM CVS
AIRCOM CC CVS
AIRCOM VS

CORAL

Innovative Air Solutions
For a cleaner future.

Design

The CORAL AIRCOM reverse pulse jet filter system is a highly efficient, self-maintaining filter for dust with a fully automatic cleaning system which uses compressed air.

The unit is manufactured from individual, reinforced steel panels which allows for extremely robust construction. The design incorporates an upper chamber which houses the compressed air cleaning system, the center section which includes the sleeve style filters and a lower section with the supporting legs, hopper and dirty air inlet.

AIRCOM

40 Models

Working Principle

The CORAL AIRCOM reverse pulse jet filter system is a highly efficient, self-maintaining filter for dust with a fully automatic cleaning system which uses compressed air.

The unit is manufactured from individual, reinforced steel panels which allows for extremely robust construction. The design incorporates an upper chamber which houses the compressed air cleaning system, the center section which includes the sleeve style filters and a lower section with the supporting legs, hopper and dirty air inlet.

Reverse pulse cleaning

The Coral AIRCOM is always running at peak efficiency due to the reverse jet cleaning system which is electronically controlled by our Coral controller. A pressure sensing switch is always monitoring the pressure loss through the filter sleeves and activates a cleaning cycle utilizing compressed air which cleans one row of filter sleeves at a time. This method of automatic cleaning allows for a continuous air flow that is not affected by the cleaning cycles.



Applications









OPERATING PRINCIPLE

LEGEND

Clean air

Air with dust


1 Dust inlet
2 Filtering sleeve PES 500 A class (standard)
3 Filtered air outlet
4 Compressed air tank
5 Maintenance door
6 Cyclic programmer
7 Hopper
8 Collection bin
9 Screw conveyor and rotary valve

OPTIONALS

10 Fan
11 Automatic or manual fire extinguishing system
12 Legs extension
13 Soundproofed box with maintenance door
14 Compressed air tank box with heaters
15 Rotary star valve (standard in CVS models) VS model
16 Stair and balcony
17 External pre-chamber


AIRCOM

WITH BINS

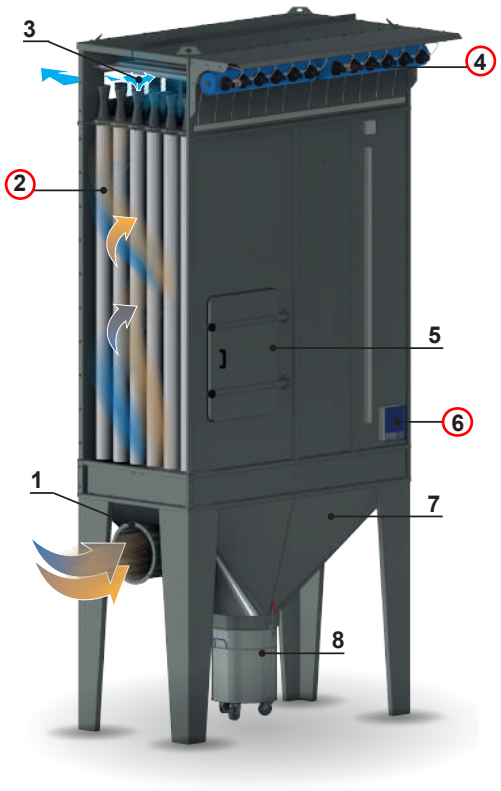


AIRCOM CVS

WITH SCREW CONVEYOR AND ROTARY VALVE
Always add the rotary valve according to our technical office suggestions.

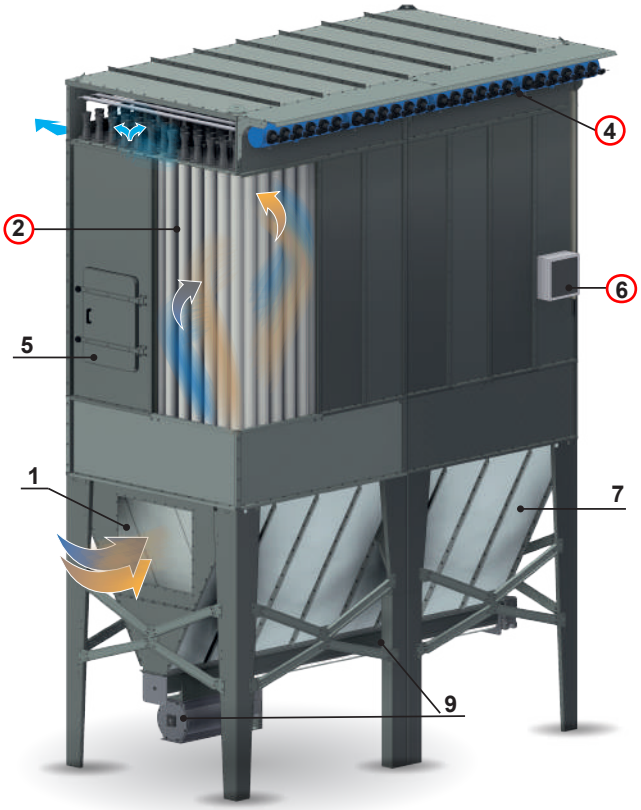


AIRCOM CC CVS

CVS PLUS SETTING CHAMBER

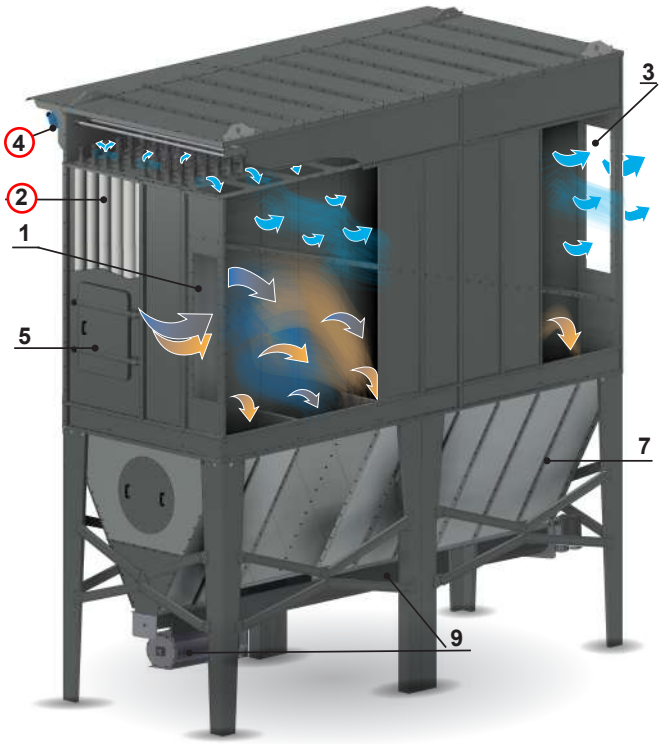

AIRCOM VS

WITH HOPPER AND ROTARY VALVE

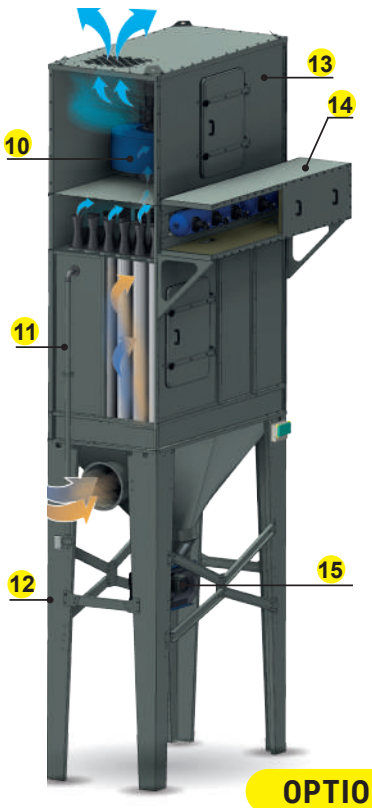

OPTIONALS



2



FILTERING SLEEVE

STANDARD	
PES 500 A	
M CLASS	polyester

OPTIONALS	
PES 500/TF	
M CLASS	polyester/PTFE coating
PES 550/AX/EXAM ACCREDITED	
M CLASS	polyester/aluminum coated/antistatic
NOMEX	
	meta-aramid fiber

- *Filtering sleeve model choice could affect various parameters.*

4



***MEMBRANE ELECTRO VALVE**: two way valve normally closed; it is activated by an electric solenoid. It holds air pressure of max.6 bar. The compressed air tank operates at 4 to 6 bar.*

	AIRCOM 36-48-50-72-108	AIRCOM 96-100-144-150-200-216-250-288-350-360-400-432-504-576
SOLENOID VALVE MODEL	SP 25	SP 40
GAS FITTINGS (IN)	1	1 ½
PRESSURE (PSI)	87	
MAX FLUID TEMPERATURE (°F)	176	176
VOLTAGE (V)	24 AC	24 AC
FREQUENCY (HZ)	60	60
POWER ABSORBED (V)	19 AC 15 DC	19 AC 15 DC
PROTECTION RATING	IP 65	IP 65
DEGREE OF PURITY OF COMPRESSED AIR	ISO 8573-1 3	ISO 8573-1 3

6



ENERGY SAVING

***CYCLIC PROGRAMMER WITH PRESSURE DROP CONTROL (PLC):** a sealed container is used with a transparent lid, duration of injection and pause phases are preset but easily changeable.*

IN/OUT VOLTAGE	230 V / 24VAC
MAXIMUM CHARGING POWER	20VA pulse
TEMPERATURE RANGE	-5°F ÷ +122°F
DISPLAY	5 LEDs h 0,5 inches
PROTECTION RATING	IP65
DP CONTROL	Internal transducer 0÷10 kPa
DIMENSIONS (INCHES)	9 x 7 x 4
TERMINAL BOARD	2.5 mm^2 250VAC









AIRCOM


TECHNICAL FEATURES

STANDARD CONFIGURATION

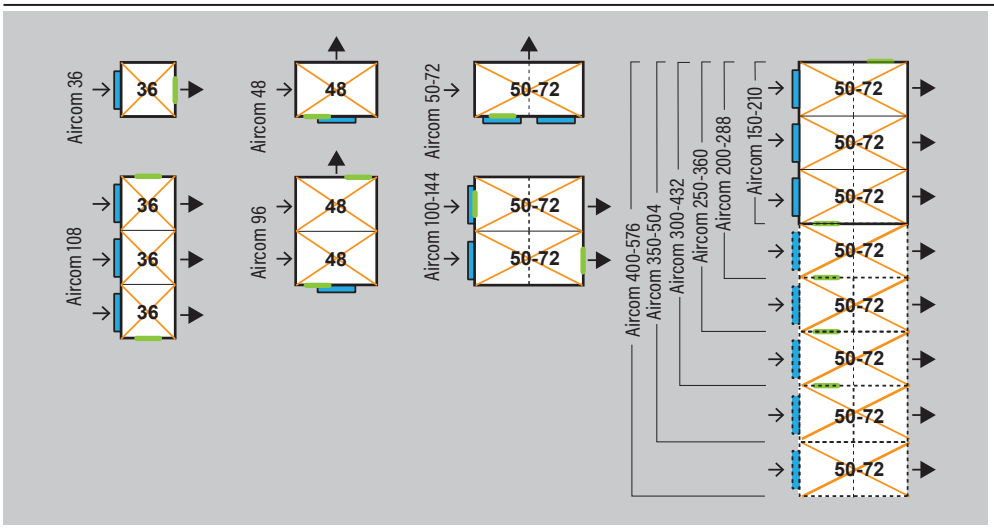


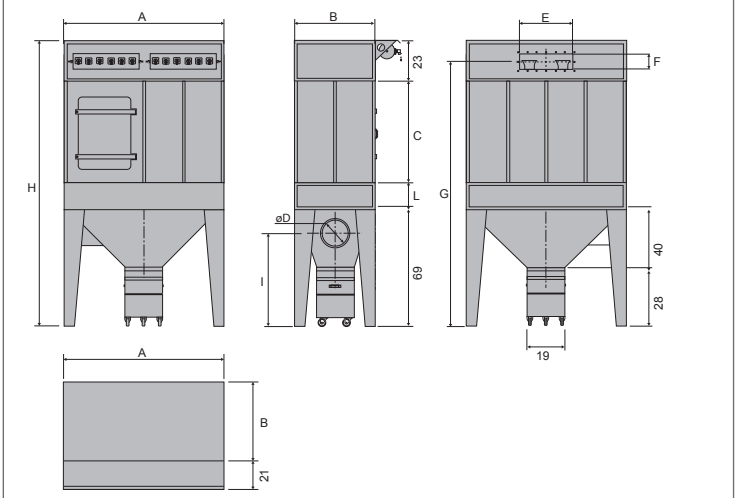

AIRCOM 36 - 48 - 50 - 72

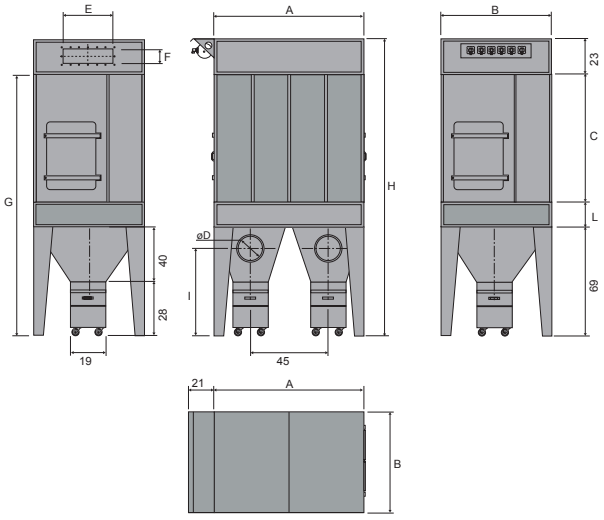

AIRCOM 96

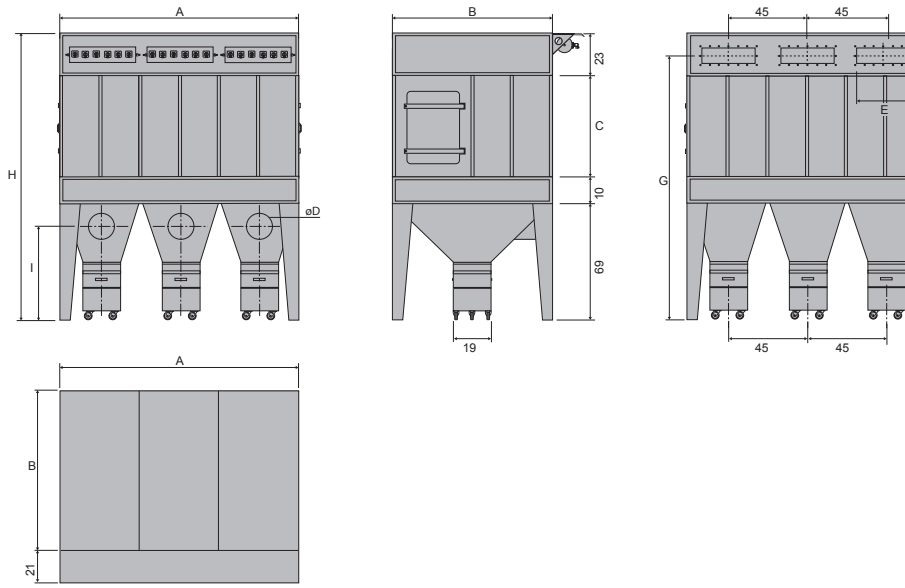

AIRCOM 100 - 108 - 144 - 150 - 200 - 216 - 250 - 288 - 300 - 350 - 360 - 400 - 432 - 504 - 576

AIRCOM

- *Version with bins.*

	DIMENSIONS (inches)												SLEEVES				PNEUMATIC CLEANING		
	Filter							Inlet		Outlet		Max air flow				Filtering surface	N° tanks	Air volume	Valves
	A	B	C	G	H	I	L	N°	ØD	N°	ExF	cfm	Ø	H inches	N°	sq.ft	N° x Ø	gal	N° x Ø
AIRCOM 36 - 1,0	45	45	39	128	143	53	9	1	15 inches	1	27 x 7 inches	1000	4 inches	39	36	139	1x Ø6"	5,76	6x 1"
AIRCOM 36 - 1,5	45	45	59	147	162	53	9	1		1		1530		59	36	215	1x Ø6"	5,76	6x 1"
AIRCOM 36 - 2,0	45	45	78	167	182	53	9	1		1		2060		78	36	290	1x Ø6"	5,76	6x 1"
AIRCOM 36 - 2,5	45	45	98	187	202	53	9	1		1		2590		98	36	365	1x Ø6"	5,76	6x 1"
AIRCOM 36 - 3,0	45	45	98	206	221	53	29	1		1		3137		118	36	441	1x Ø6"	5,76	6x 1"
AIRCOM 48 - 1,5	67	45	59	147	162	53	9	1		1		2060		59	48	290	1x Ø6"	5,76	6x 1"
AIRCOM 48 - 2,0	67	45	78	167	182	53	9	1		1		2766		78	48	387	1x Ø6"	5,76	6x 1"
AIRCOM 48 - 2,5	67	45	98	187	202	53	9	1		1		3443		98	48	484	1x Ø6"	5,76	6x 1"
AIRCOM 48 - 3,0	67	45	98	206	221	53	29	1		1		4120		118	48	581	1x Ø6"	5,76	6x 1"
AIRCOM 72 - 1,5	90	45	59	147	162	53	9	1		2		3137		59	72	441	2x Ø6"	5,76	12x 1"
AIRCOM 72 - 2,0	90	45	78	167	182	53	9	1		2		4120		78	72	581	2x Ø6"	5,76	12x 1"
AIRCOM 72 - 2,5	90	45	98	187	202	53	9	1		2		5210		98	72	731	2x Ø6"	5,76	12x 1"
AIRCOM 72 - 3,0	90	45	98	206	221	53	29	1		2		6230		118	72	781	2x Ø6"	5,76	12x 1"
AIRCOM 96 - 1,5	90	67	59	147	162	53	9	2		2		4120		59	96	581	1x Ø8"	15,35	8x 1" ½
AIRCOM 96 - 2,0	90	67	78	167	182	53	9	2		2		5532		78	96	775	1x Ø8"	15,35	8x 1" ½
AIRCOM 96 - 2,5	90	67	98	187	202	53	9	2		2		6915		98	96	968	1x Ø8"	15,35	8x 1" ½
AIRCOM 96 - 3,0	90	67	98	206	221	53	29	2		2		8300		118	96	1173	1x Ø8"	15,35	8x 1" ½
AIRCOM 108 - 1,5	136	45	59	147	162	53	9	3		3		4710		59	108	656	3x Ø6"	5,76	18x 1"
AIRCOM 108 - 2,0	136	45	78	167	182	53	9	3		3		6274		78	108	882	3x Ø6"	5,76	18x 1"
AIRCOM 108 - 2,5	136	45	98	187	202	53	9	3		3		7800		98	108	1097	3x Ø6"	5,76	18x 1"
AIRCOM 108 - 3,0	136	45	98	206	221	53	29	3		3		9340		118	108	1313	3x Ø6"	5,76	18x 1"
AIRCOM 144 - 2,0	90	90	78	167	182	53	9	2		2		8360		78	144	1173	2x Ø8"	10,12	12x 1" ½
AIRCOM 144 - 2,5	90	90	98	187	202	53	9	2		2		10380		98	144	1463	2x Ø8"	10,12	12x 1" ½
AIRCOM 144 - 3,0	90	90	98	206	221	53	29	2		2		12454		118	144	1754	2x Ø8"	10,12	12x 1" ½
AIRCOM 216 - 2,0	136	90	78	167	182	53	9	3		3		12360		78	216	1743	3x Ø8"	10,12	18x 1" ½
AIRCOM 216 - 2,5	136	90	98	187	202	53	9	3		3		15570		98	216	2185	3x Ø8"	10,12	18x 1" ½
AIRCOM 216 - 3,0	136	90	98	206	221	53	29	3		3		18690		118	216	2686	3x Ø8"	10,12	18x 1" ½
AIRCOM 288 - 2,0	181	90	78	167	182	53	9			4		16600		78	288	2335	4x Ø8"	10,12	24x 1" ½
AIRCOM 288 - 2,5	181	90	98	187	202	53	9	4		4		20753		98	288	2917	4x Ø8"	10,12	24x 1" ½
AIRCOM 288 - 3,0	181	90	98	206	221	53	29	4		4		24910		118	288	3509	4x Ø8"	10,12	24x 1" ½
AIRCOM 360 - 2,5	226	90	98	187	202	53	9	5		5		25944		98	360	339	5x Ø8"	10,12	30x 1" ½
AIRCOM 360 - 3,0	226	90	98	206	221	53	29	5		5		31135		118	360	407	5x Ø8"	10,12	30x 1" ½
AIRCOM 432 - 2,5	271	90	98	187	202	53	9	6		6		31224		98	432	408	6x Ø8"	10,12	36x 1" ½
AIRCOM 432 - 3,0	271	90	98	206	221	53	29	6		6		37362		118	432	486	6x Ø8"	10,12	36x 1" ½
AIRCOM 504 - 2,5	317	90	98	187	202	53	9	7		7		36462		98	504	476	7x Ø8"	10,12	42x 1" ½
AIRCOM 504 - 3,0	317	90	98	206	221	53	29	7		7		44702		118	504	567	7x Ø8"	10,12	42x 1" ½
AIRCOM 576 - 2,5	362	90	98	187	202	53	9	8		8		41671		98	576	544	8x Ø8"	10,12	48x 1" ½
AIRCOM 576 - 3,0	362	90	98	206	221	53	29	8		8		49823		118	576	648	8x Ø8"	10,12	48x 1" ½


REDUCED SLEEVES QUANTITY


	A	B	C	G	H	I	L	N°	ØD	N°	ExF	cfm	Ø	H inches	N°	Sqft	N° x Ø	gal	N° x Ø
AIRCOM 50 - 2,0	2300	1150	2000	4750	4630	1360	250	1	15 inches	2	27 x 7 inches	2754	4 inches	78	50	409	2x Ø6"	5,76	10x 1"
AIRCOM 50 - 2,5	2300	1150	2500	5250	5130	1360	250	1		2		3620		98	50	505	2x Ø6"	5,76	10x 1"
AIRCOM 50 - 3,0	2300	1150	2500	5250	5630	1360	750	1		2		4326		118	50	602	2x Ø6"	5,76	10x 1"
AIRCOM 100 - 2,0	2300	2300	2000	4750	4630	1360	250	2		2		5803		78	100	807	2x Ø8"	10,12	10x 1" ½
AIRCOM 100 - 2,5	2300	2300	2500	5250	5130	1360	250	2		2		7210		98	100	1011	2x Ø8"	10,12	10x 1" ½
AIRCOM 100 - 3,0	2300	2300	2500	5250	5630	1360	750	2		2		8830		118	100	1194	2x Ø8"	10,12	10x 1" ½
AIRCOM 150 - 2,0	3450	2300	2000	4750	4630	1360	250	3		3		8710		78	150	1216	3x Ø8"	10,12	15x 1" ½
AIRCOM 150 - 2,5	3450	2300	2500	5250	5130	1360	250	3		3		10830		98	150	1517	3x Ø8"	10,12	15x 1" ½
AIRCOM 150 - 3,0	3450	2300	2500	5250	5630	1360	750	3		3		13243		118	150	1797	3x Ø8"	10,12	15x 1" ½
AIRCOM 200 - 2,0	4600	2300	2000	4750	4630	1360	250	4		4		11606		78	200	1614	4x Ø8"	10,12	20x 1" ½
AIRCOM 200 - 2,5	4600	2300	2500	5250	5130	1360	250	4		4		14420		98	200	2023	4x Ø8"	10,12	20x 1" ½
AIRCOM 200 - 3,0	4600	2300	2500	5250	5630	1360	750	4		4		17660		118	200	2389	4x Ø8"	10,12	20x 1" ½
AIRCOM 250 - 2,5	5750	2300	2500	5250	5130	1360	250	5		5		18010		98	250	2529	5x Ø8"	10,12	25x 1" ½
AIRCOM 250 - 3,0	5750	2300	2500	5250	5630	1360	750	5		5		22071		118	250	3024	5x Ø8"	10,12	25x 1" ½
AIRCOM 300 - 2,5	6900	2300	2500	5250	5130	1360	250	6		6		21451		98	300	3024	6x Ø8"	10,12	30x 1" ½
AIRCOM 300 - 3,0	6900	2300	2500	5250	5630	1360	750	6		6		25900		118	300	3638	6x Ø8"	10,12	30x 1" ½
AIRCOM 350 - 2,5	8050	2300	2500	5250	5130	1360	250	7		7		25191		98	350	3530	7x Ø8"	10,12	35x 1" ½
AIRCOM 350 - 3,0	8050	2300	2500	5250	5630	1360	750	7		7		30270		118	350	4240	7x Ø8"	10,12	35x 1" ½
AIRCOM 400 - 2,5	9200	2300	2500	5250	5130	1360	250	8		8		28900		98	400	4036	8x Ø8"	10,12	40x 1" ½
AIRCOM 400 - 3,0	9200	2300	2500	5250	5630	1360	750	8		8		34580		118	400	4843	8x Ø8"	10,12	40x 1" ½

AIRCOM CVS

TECHNICAL FEATURES

STANDARD CONFIGURATION

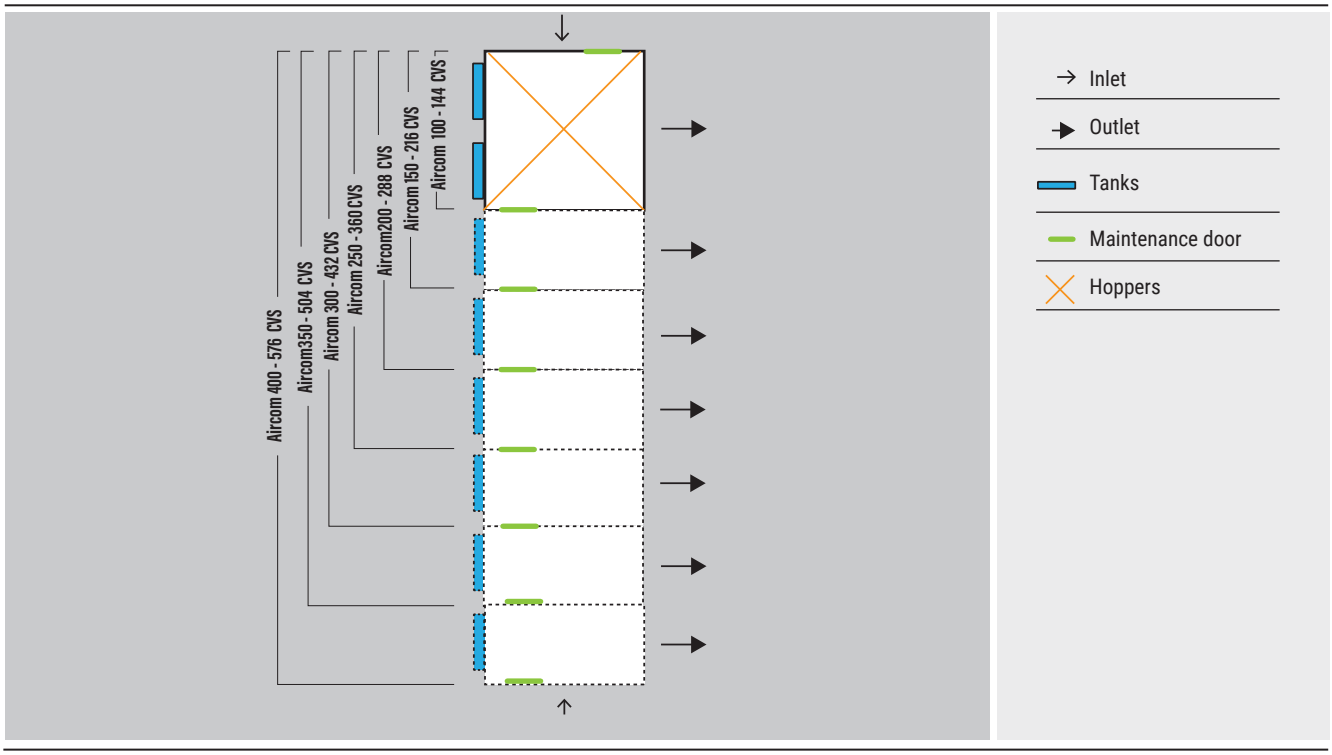

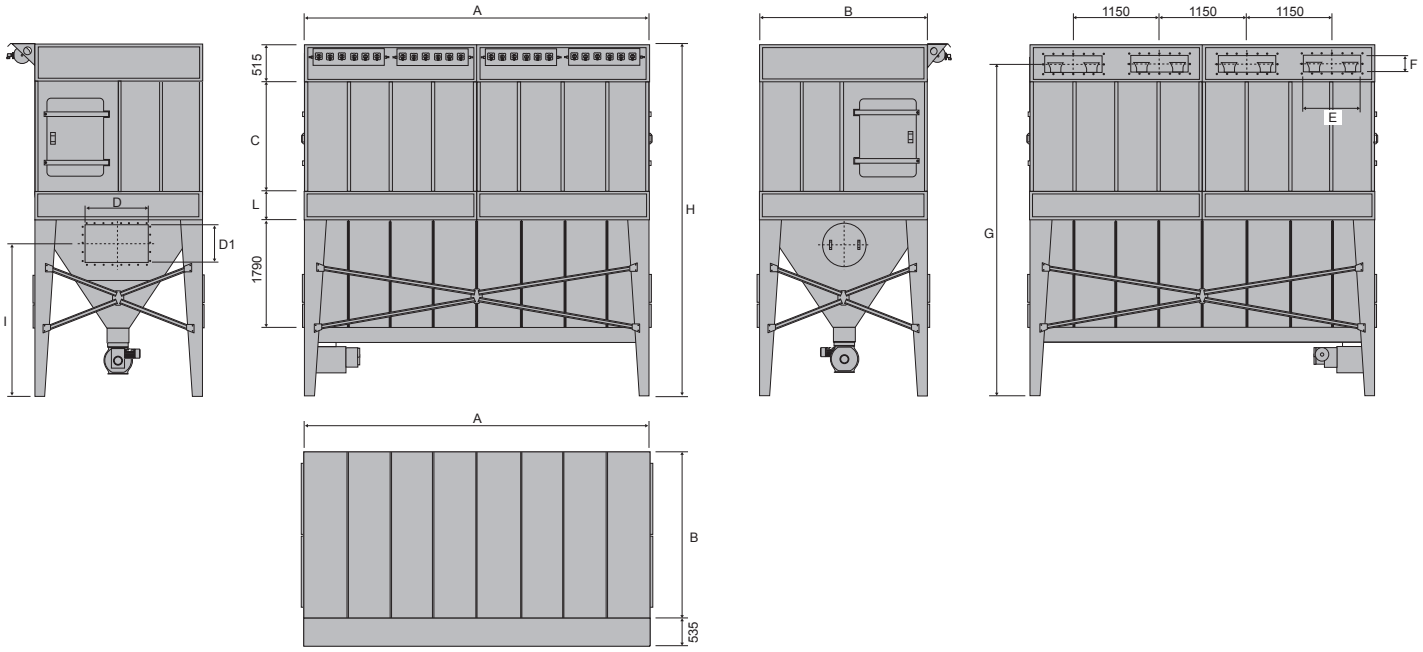

AIRCOM CVS 100 - 144 - 150 - 200 - 216 - 250 - 288 - 300 - 350 - 360 - 400 - 432 - 504 - 576

AIRCOM CVS

- *Version with screw conveyor and rotary valve.*

	DIMENSIONS (inches)												SLEEVES				PNEUMATIC CLEANING		
	Filter							Inlet		Outlet		Max air flow				Filtering surface	N° tanks	Air volume	Valves
	A	B	C	G	H	I	L	N°	DxD1	N°	ExF	cfm	Ø	H	N°	sq.ft	N° x Ø	gal	N° x Ø
AIRCOM 144 - 2,0 CVS	90	90	125	167	226	95	10	1	39 x 31	2	27 x 8	8357	5 inches	78	144	1173	2 x Ø8"	10,12	12x 1" ½
AIRCOM 144 - 2,5 CVS	90	90	145	187	246	95	10	1	39 x 31	2	27 x 8	10376		98	144	1463	2 x Ø8"	10,12	12x 1" ½
AIRCOM 144 - 3,0 CVS	90	90	165	206	265	95	29	1	39 x 31	2	27 x 8	12454		118	144	1754	2 x Ø8"	10,12	12x 1" ½
AIRCOM 216 - 2,0 CVS	135	90	125	167	226	95	10	1	39 x 31	3	27 x 8	12360		78	216	1743	3 x Ø8"	10,12	18x 1" ½
AIRCOM 216 - 2,5 CVS	135	90	145	187	246	95	10	1	39 x 31	3	27 x 8	15567		98	216	2185	3 x Ø8"	10,12	18x 1" ½
AIRCOM 216 - 3,0 CVS	135	90	165	206	265	95	29	1	39 x 31	3	27 x 8	18681		118	216	2626	3 x Ø8"	10,12	18x 1" ½
AIRCOM 288 - 2,5 CVS	181	90	145	187	246	95	10	1	39 x 31	4	27 x 8	20753		98	288	2917	4 x Ø8"	10,12	24x 1" ½
AIRCOM 288 - 3,0 CVS	181	90	165	206	265	95	29	1	39 x 31	4	27 x 8	24910		118	288	3509	4 x Ø8"	10,12	24x 1" ½
AIRCOM 360 - 2,5 CVS	0,13	90	145	187	246	95	10	1	39 x 31	5	27 x 8	25944		98	360	3648	5 x Ø8"	10,12	30x 1" ½
AIRCOM 360 - 3,0 CVS	226	90	165	206	265	95	29	1	39 x 31	5	27 x 8	31135		118	360	4380	5 x Ø8"	10,12	30x 1" ½
AIRCOM 432 - 2,5 CVS	271	90	145	187	246	95	10	1	39 x 31	6	27 x 8	31224		98	432	4391	6 x Ø8"	10,12	36x 1" ½
AIRCOM 432 - 3,0 CVS	271	90	165	206	265	95	29	1	39 x 31	6	27 x 8	37362		118	432	5231	6 x Ø8"	10,12	36x 1" ½
AIRCOM 504 - 2,5 CVS	316	90	145	187	246	95	10	1	39 x 31	7	27 x 8	36462		98	504	5123	7 x Ø8"	10,12	42x 1" ½
AIRCOM 504 - 3,0 CVS	316	90	165	206	265	95	29	1	39 x 31	7	27 x 8	44702		118	504	6103	7 x Ø8"	10,12	42x 1" ½
AIRCOM 576 - 2,5 CVS	362	90	145	187	246	95	10	1	39 x 31	8	27 x 8	41671		98	576	5855	8 x Ø8"	10,12	48x 1" ½
AIRCOM 576 - 3,0 CVS	362	90	165	206	265	95	29	1	39 x 31	8	27 x 8	48823		118	576	6975	8 x Ø8"	10,12	48x 1" ½


REDUCED SLEEVES QUANTITY


	A	B	C	G	H	I	L	N°	DxD1	N°	ExF	cfm	Ø	H	N°	sq.ft	N° x Ø	gal	N° x Ø
AIRCOM 100 - 2,0 CVS	90	90	125	167	226	95	10	1	39 x 31	2	27 x 8	5803	5 inches	78	100	807	2 x Ø8"	10,12	10x 1" ½
AIRCOM 100 - 2,5 CVS	90	90	145	187	246	95	10	1	39 x 31	2	27 x 8	7210		98	100	1011	2 x Ø8"	10,12	10x 1" ½
AIRCOM 100 - 3,0 CVS	90	90	165	206	265	95	29	1	39 x 31	2	27 x 8	8828		118	100	1194	2 x Ø8"	10,12	10x 1" ½
AIRCOM 150 - 2,0 CVS	135	90	125	167	226	95	10	1	39 x 31	3	27 x 8	8710		78	150	1216	3 x Ø8"	10,12	15x 1" ½
AIRCOM 150 - 2,5 CVS	135	90	145	187	246	95	10	1	39 x 31	3	27 x 8	10829		98	150	1517	3 x Ø8"	10,12	15x 1" ½
AIRCOM 150 - 3,0 CVS	135	90	165	206	265	95	29	1	39 x 31	3	27 x 8	13243		118	150	1797	3 x Ø8"	10,12	15x 1" ½
AIRCOM 200 - 2,0 CVS	181	90	125	167	226	95	10	1	39 x 31	4	27 x 8	11606		78	200	1614	4 x Ø8"	10,12	20x 1" ½
AIRCOM 200 - 2,5 CVS	181	90	145	187	246	95	10	1	39 x 31	4	27 x 8	14420		98	200	2023	4 x Ø8"	10,12	20x 1" ½
AIRCOM 200 - 3,0 CVS	181	90	165	206	265	95	29	1	39 x 31	4	27 x 8	17657		118	200	2389	4 x Ø8"	10,12	20x 1" ½
AIRCOM 250 - 2,5 CVS	226	90	145	187	246	95	10	1	39 x 31	5	27 x 8	18010		98	250	2529	5 x Ø8"	10,12	25x 1" ½
AIRCOM 250 - 3,0 CVS	226	90	165	206	265	95	29	1	39 x 31	5	27 x 8	22071		118	250	3024	5 x Ø8"	10,12	25x 1" ½
AIRCOM 300 - 2,5 CVS	271	90	145	187	246	95	10	1	39 x 31	6	27 x 8	21541		98	360	3024	6 x Ø8"	10,12	30x 1" ½
AIRCOM 300 - 3,0 CVS	271	90	165	206	265	95	29	1	39 x 31	6	27 x 8	25897		118	360	3638	6 x Ø8"	10,12	30x 1" ½
AIRCOM 350 - 2,5 CVS	316	90	145	187	246	95	10	1	39 x 31	7	27 x 8	25191		98	360	3530	7 x Ø8"	10,12	35x 1" ½
AIRCOM 350 - 3,0 CVS	316	90	165	206	265	95	29	1	39 x 31	7	27 x 8	30270		118	360	4240	7 x Ø8"	10,12	35x 1" ½
AIRCOM 400 - 2,5 CVS	362	90	145	187	246	95	10	1	39 x 31	8	27 x 8	28899		98	432	4036	8 x Ø8"	10,12	40x 1" ½
AIRCOM 400 - 3,0 CVS	362	90	165	206	265	95	29	1	39 x 31	8	27 x 8	34578		118	432	4843	8 x Ø8"	10,12	40x 1" ½


AIRCOM CC-CVS

DATI TECNICI CARACTERISTIQUES TECNIQUES | TECHNICAL FEATURES | TECHNISCHE DATEN | CARACTERÍSTICAS TÉCNICAS

CONFIGURAZIONI STANDARD
CONFIGURATION STANDARD
STANDARD CONFIGURATION
CONFIGURACIONES STANDARD
STANDARDKONFIGURATION

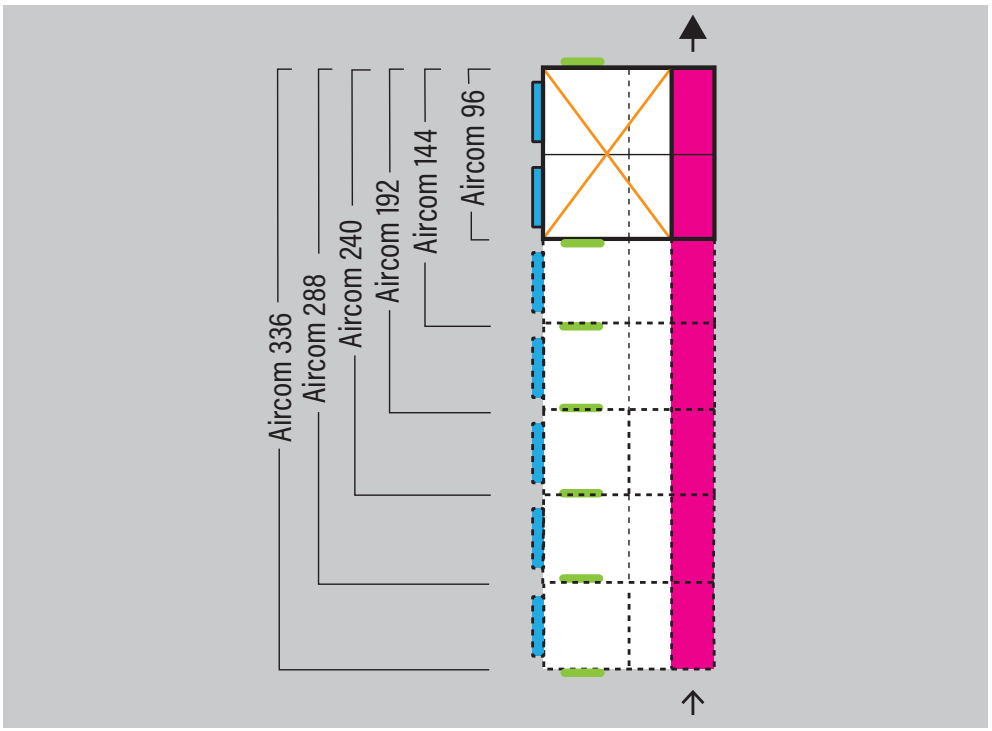

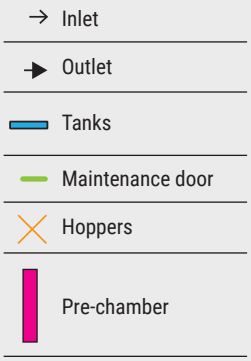

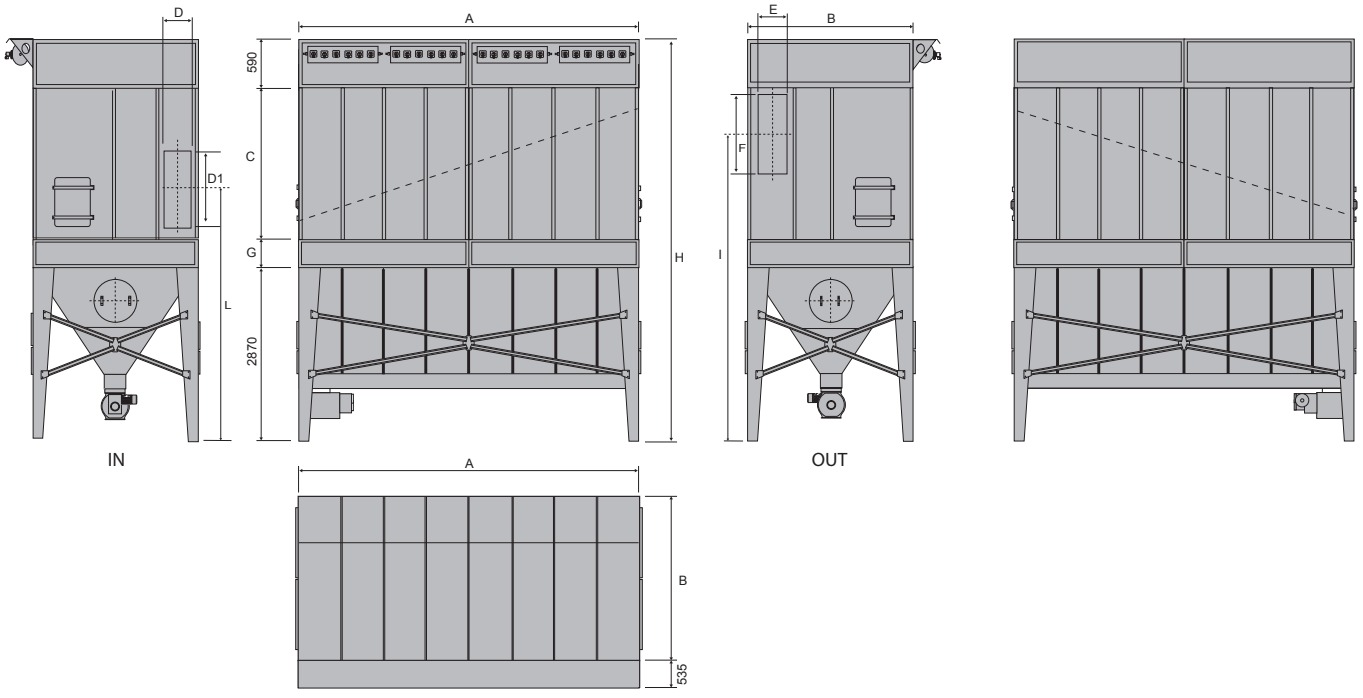

AIRCOM CC CVS 96 - 144 - 192 - 240 - 288 - 336

AIRCOM CC-CVS


- *Version CVS plus setting chamber.*


	DIMENSIONS (inches)										
	Filter							Inlet		Outlet	
	A	B	C	G	H	I	L	N°	DxD1	N°	ExF
AIRCOM 96 - 2,0 CC-CVS	90	90	78	10	226	172	152	1	13 x 23	1	13 x 23
AIRCOM 96 - 2,5 CC-CVS	90	90	98	10	246	181	162	1	13 x 23	1	13 x 23
AIRCOM 96 - 3,0 CC-CVS	90	90	98	29	265	201	181	1	13 x 23	1	13 x 23
AIRCOM 144 - 2,0 CC-CVS	135	90	78	10	226	168	152	1	13 x 35	1	13 x 35
AIRCOM 144 - 2,5 CC-CVS	135	90	98	10	246	181	162	1	13 x 35	1	13 x 35
AIRCOM 144 - 3,0 CC-CVS	135	90	98	29	265	201	181	1	13 x 35	1	13 x 35
AIRCOM 192 - 2,0 CC-CVS	181	90	78	10	226	172	148	1	13 x 43	1	13 x 43
AIRCOM 192 - 2,5 CC-CVS	181	90	98	10	246	181	158	1	13 x 43	1	13 x 43
AIRCOM 192 - 3,0 CC-CVS	181	90	98	29	265	201	177	1	13 x 43	1	13 x 43
AIRCOM 240 - 2,0 CC-CVS	226	90	78	10	226	168	156	1	13 x 59	1	13 x 59
AIRCOM 240 - 2,5 CC-CVS	226	90	98	10	246	181	166	1	13 x 59	1	13 x 59
AIRCOM 240 - 3,0 CC-CVS	226	90	98	29	265	201	185	1	13 x 59	1	13 x 59
AIRCOM 288 - 2,0 CC-CVS	271	90	78	10	226	168	156	1	13 x 59	1	13 x 59
AIRCOM 288 - 2,5 CC-CVS	271	90	98	10	246	181	166	1	13 x 59	1	13 x 59
AIRCOM 288 - 3,0 CC-CVS	271	90	98	29	265	201	185	1	13 x 59	1	13 x 59
AIRCOM 336 - 2,5 CC-CVS	316	90	98	10	246	192	187	1	15 x 86	1	15 x 86
AIRCOM 336 - 3,0 CC-CVS	316	90	98	29	265	212	207	1	15 x 86	1	15 x 86


		SLEEVES				PNEUMATIC CLEANING		
	Max air flow				Filtering surface	N° tanks	Air volume	Valves
	cfm	Ø	H inch	N°	sq.ft	N° x Ø	gal	N° x Ø
AIRCOM 96 - 2,0 CC-CVS	6980	5 inches	78	96	796	2x Ø6"	5,76	12x 1"
AIRCOM 96 - 2,5 CC-CVS	8181		98	96	1001	2x Ø6"	5,76	12x 1"
AIRCOM 96 - 3,0 CC-CVS	9164		118	96	1194	2x Ø6"	5,76	12x 1"
AIRCOM 144 - 2,0 CC-CVS	10476		78	144	1194	3x Ø6"	5,76	18x 1"
AIRCOM 144 - 2,5 CC-CVS	12271		98	144	1496	3x Ø6"	5,76	18x 1"
AIRCOM 144 - 3,0 CC-CVS	13749		118	144	1797	3x Ø6"	5,76	18x 1"
AIRCOM 192 - 2,0 CC-CVS	13966		78	192	1593	4x Ø6"	5,76	24x 1"
AIRCOM 192 - 2,5 CC-CVS	16368		98	192	1991	4x Ø6"	5,76	24x 1"
AIRCOM 192 - 3,0 CC-CVS	18328		118	192	2389	4x Ø6"	5,76	24x 1"
AIRCOM 240 - 2,0 CC-CVS	17457		78	240	1991	5x Ø8"	5,76	30x 1"
AIRCOM 240 - 2,5 CC-CVS	20458		98	240	1497	5x Ø8"	5,76	30x 1"
AIRCOM 240 - 3,0 CC-CVS	22913		118	240	2992	5x Ø8"	5,76	30x 1"
AIRCOM 288 - 2,0 CC-CVS	20953		78	288	2389	6x Ø6"	5,76	36x 1"
AIRCOM 288 - 2,5 CC-CVS	24547		98	288	2992	6x Ø6"	5,76	36x 1"
AIRCOM 288 -3,0 CC-CVS	31430		118	288	3595	6x Ø6"	5,76	36x 1"
AIRCOM 336 - 2,5	28640		98	576	3498	7x Ø8"	5,76	42x 1"
AIRCOM 336 - 3,0	32018		118	576	4176	7x Ø8"	5,76	42x 1"


AIRCOM

INSTALLATION EXAMPLES

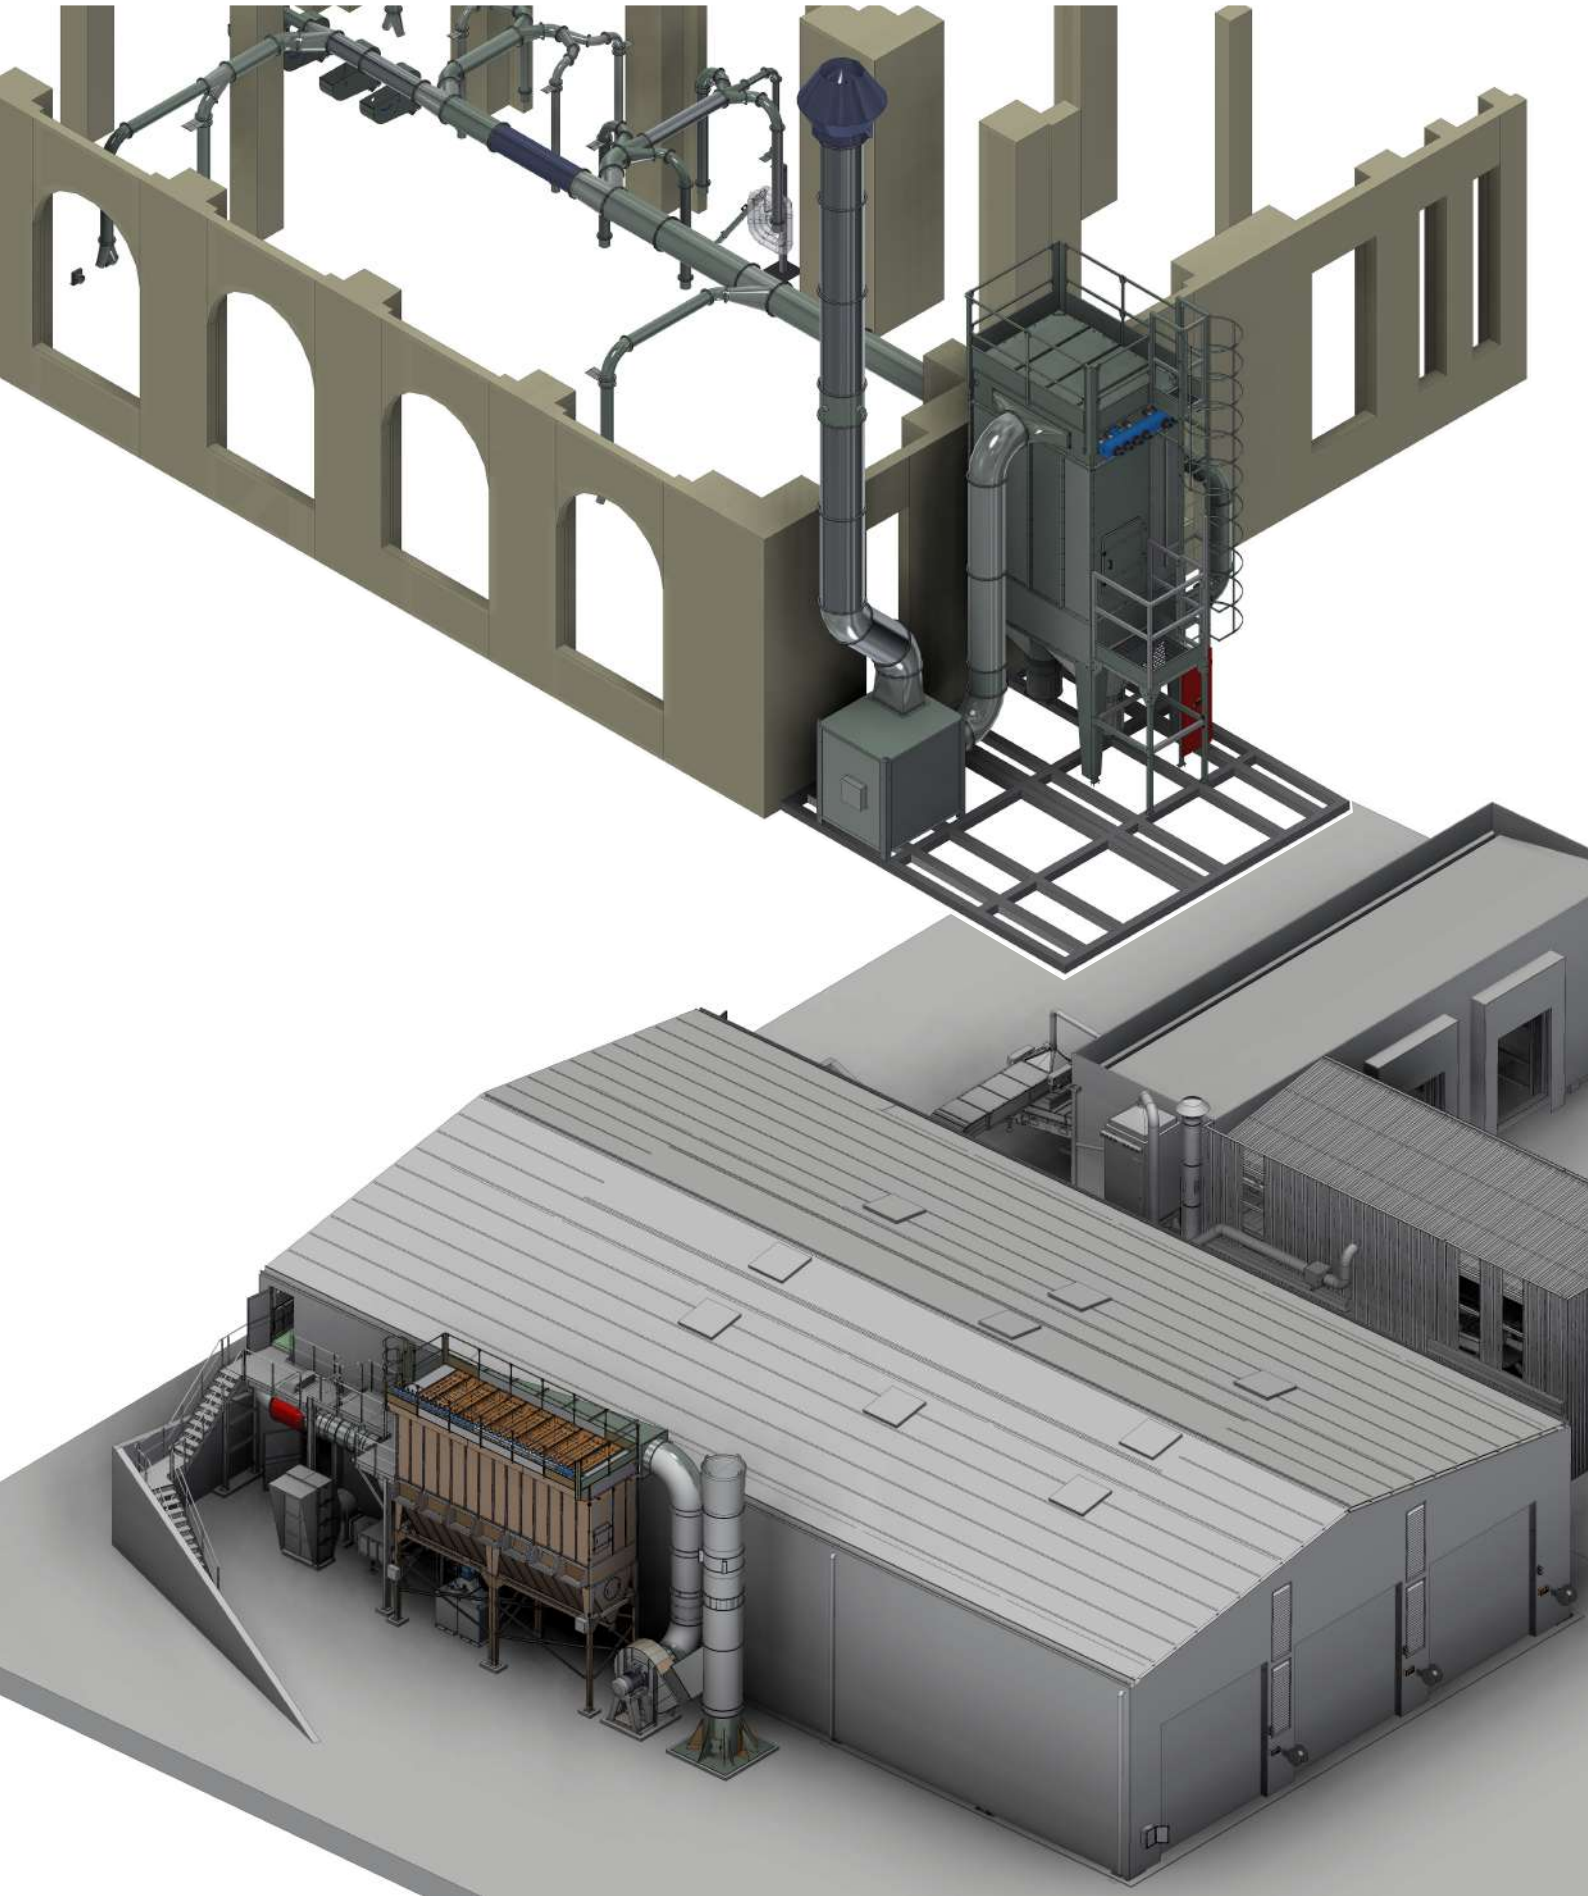


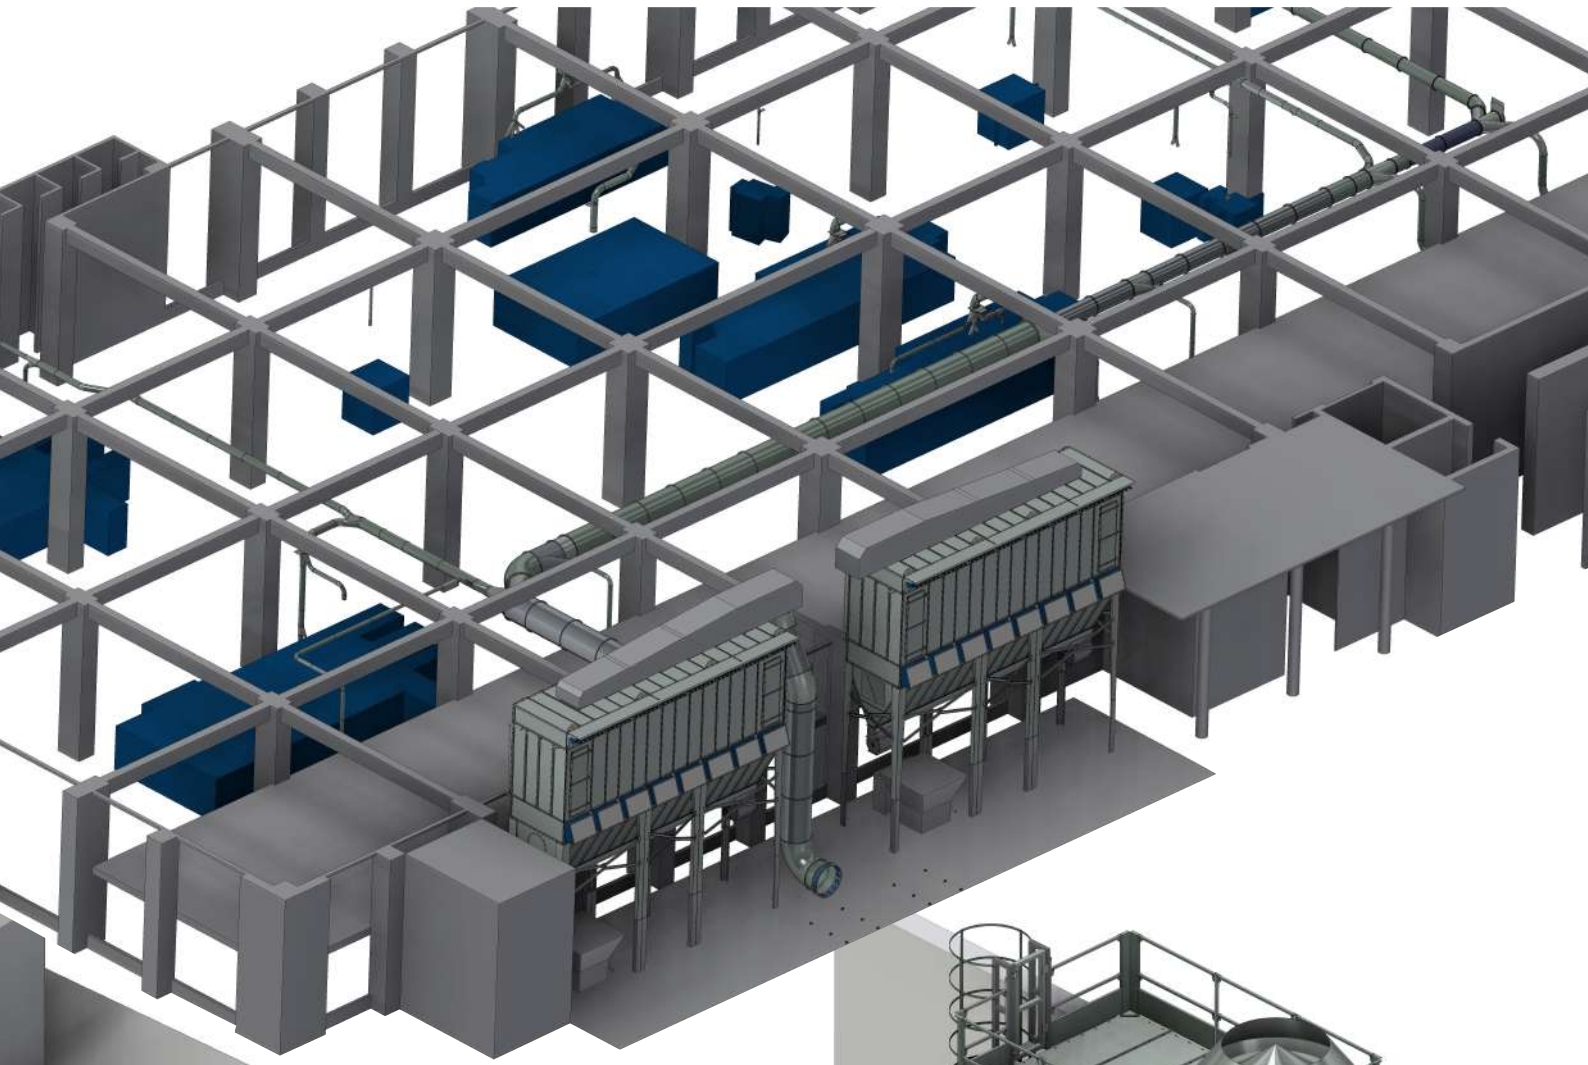

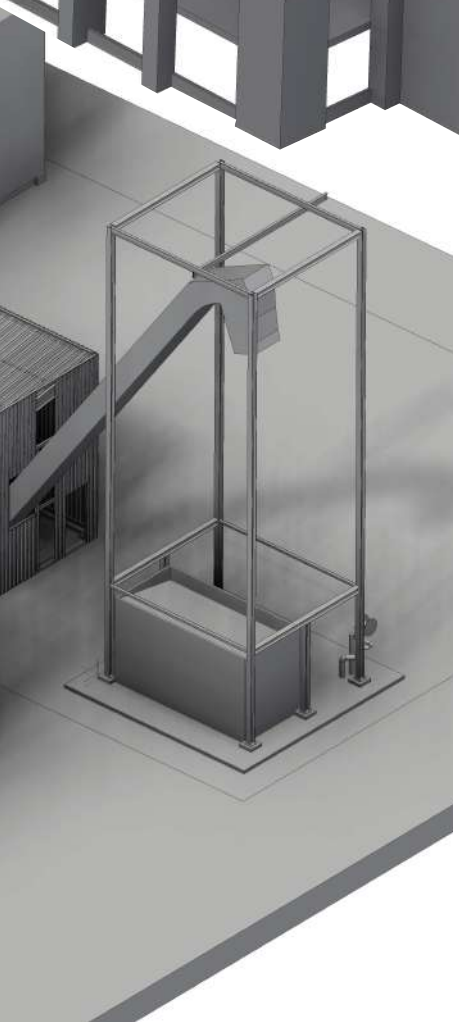

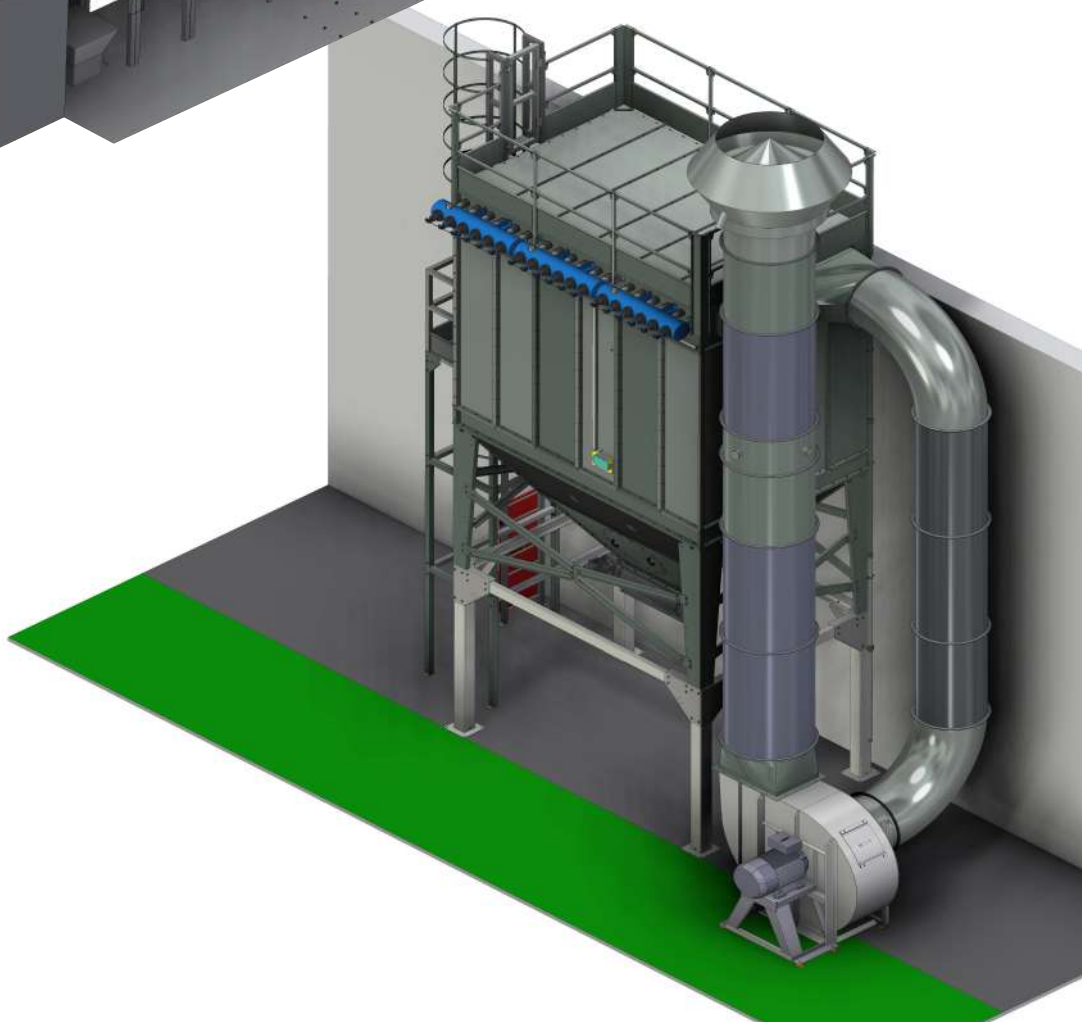



AIRCOM

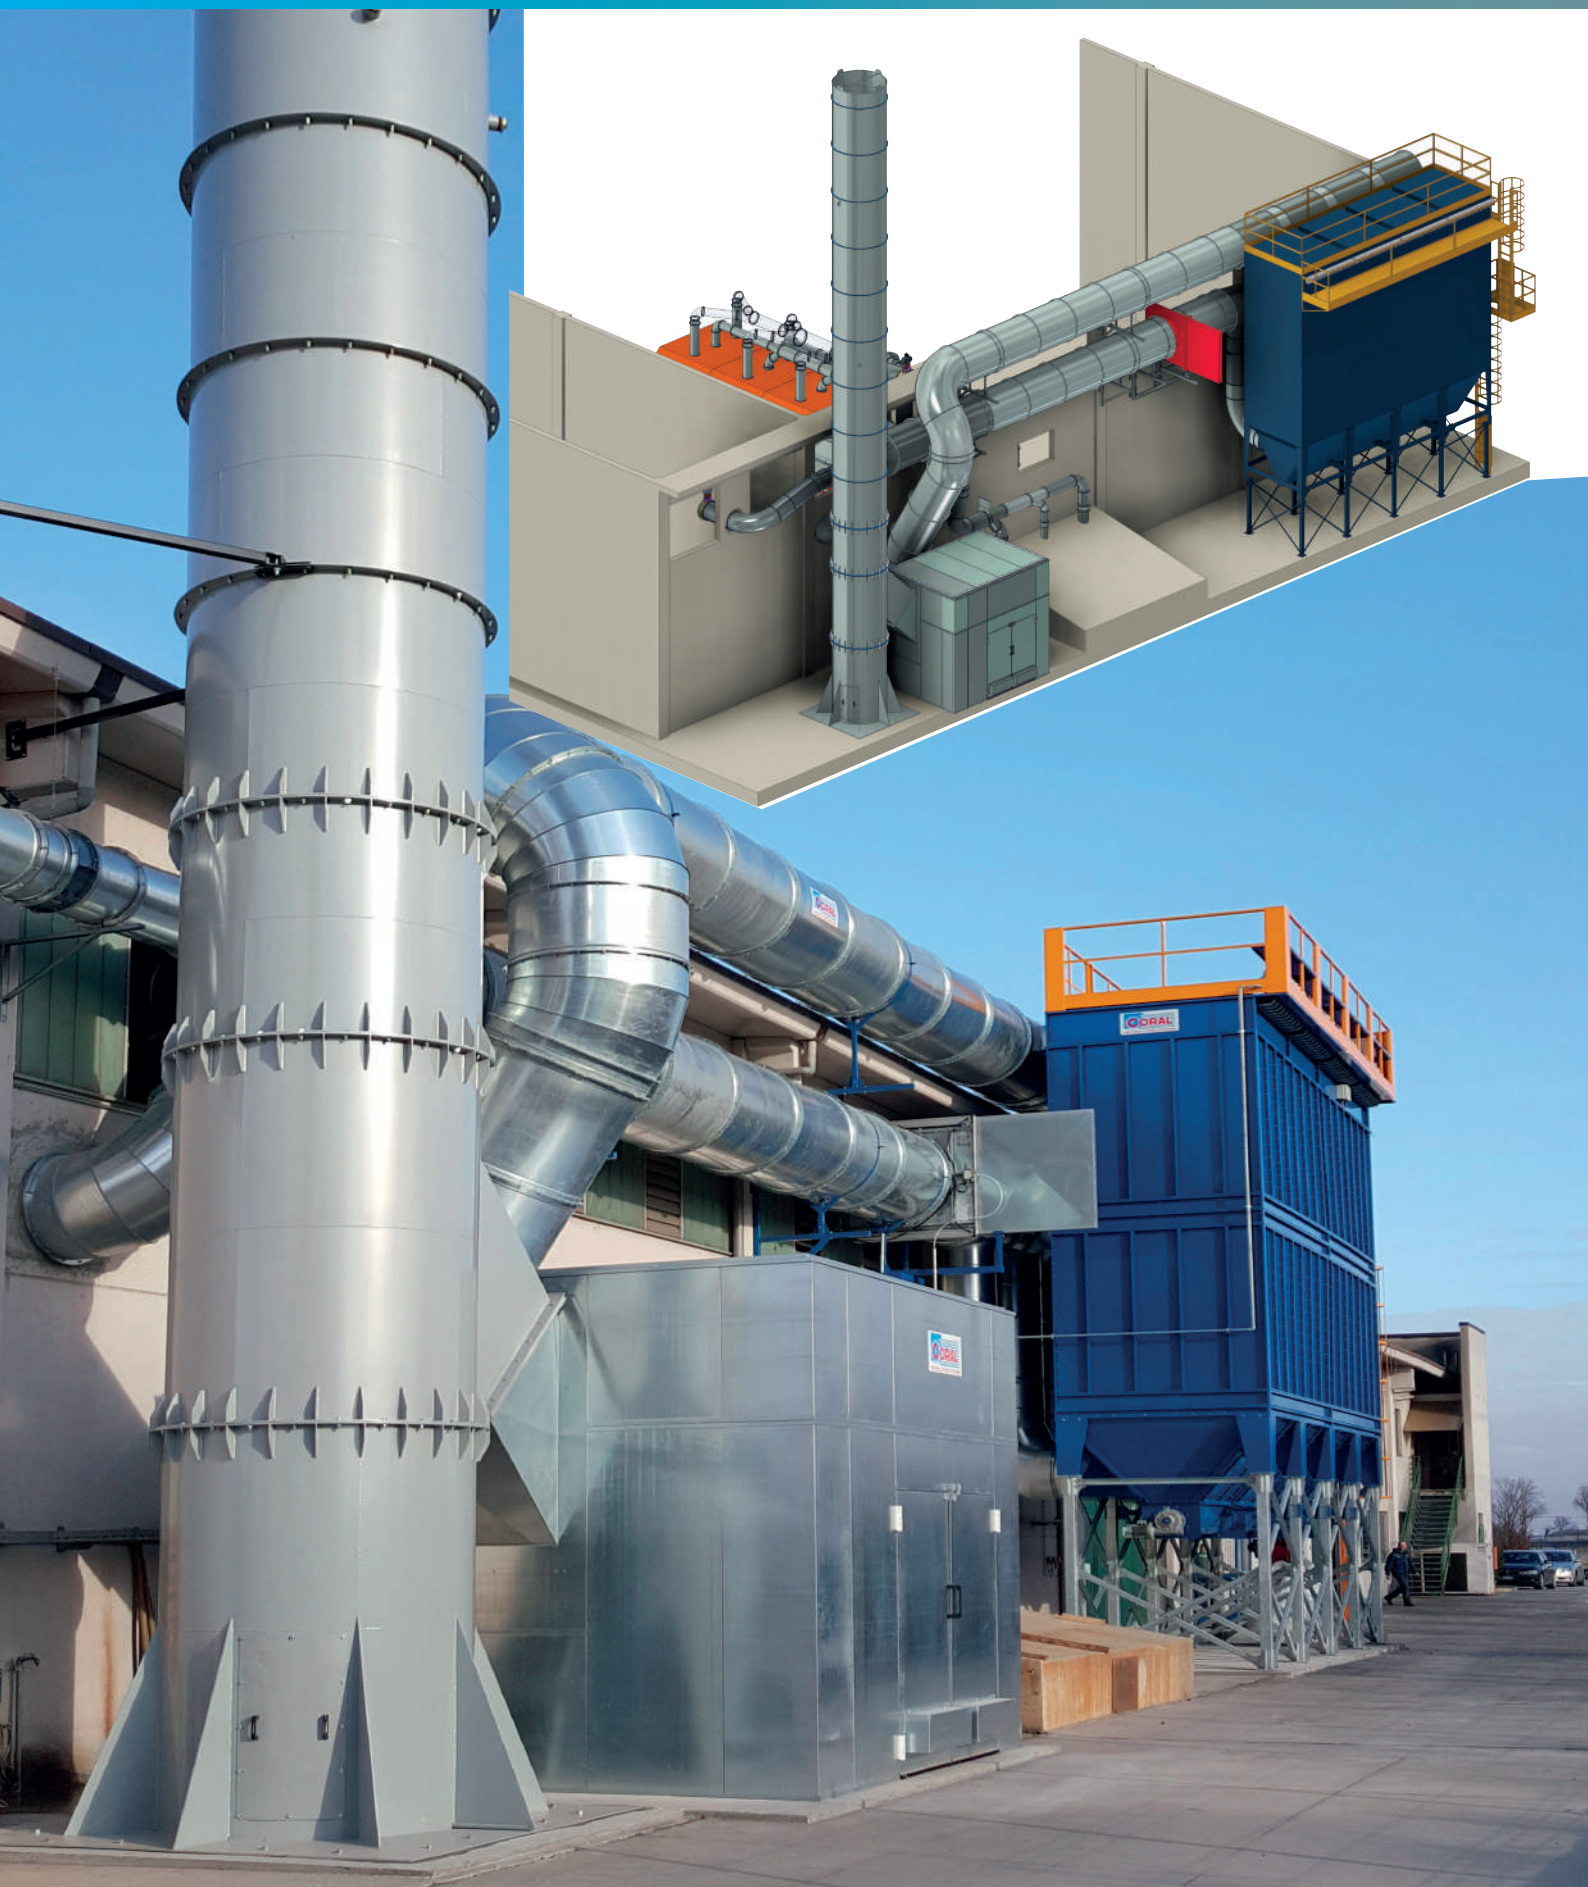



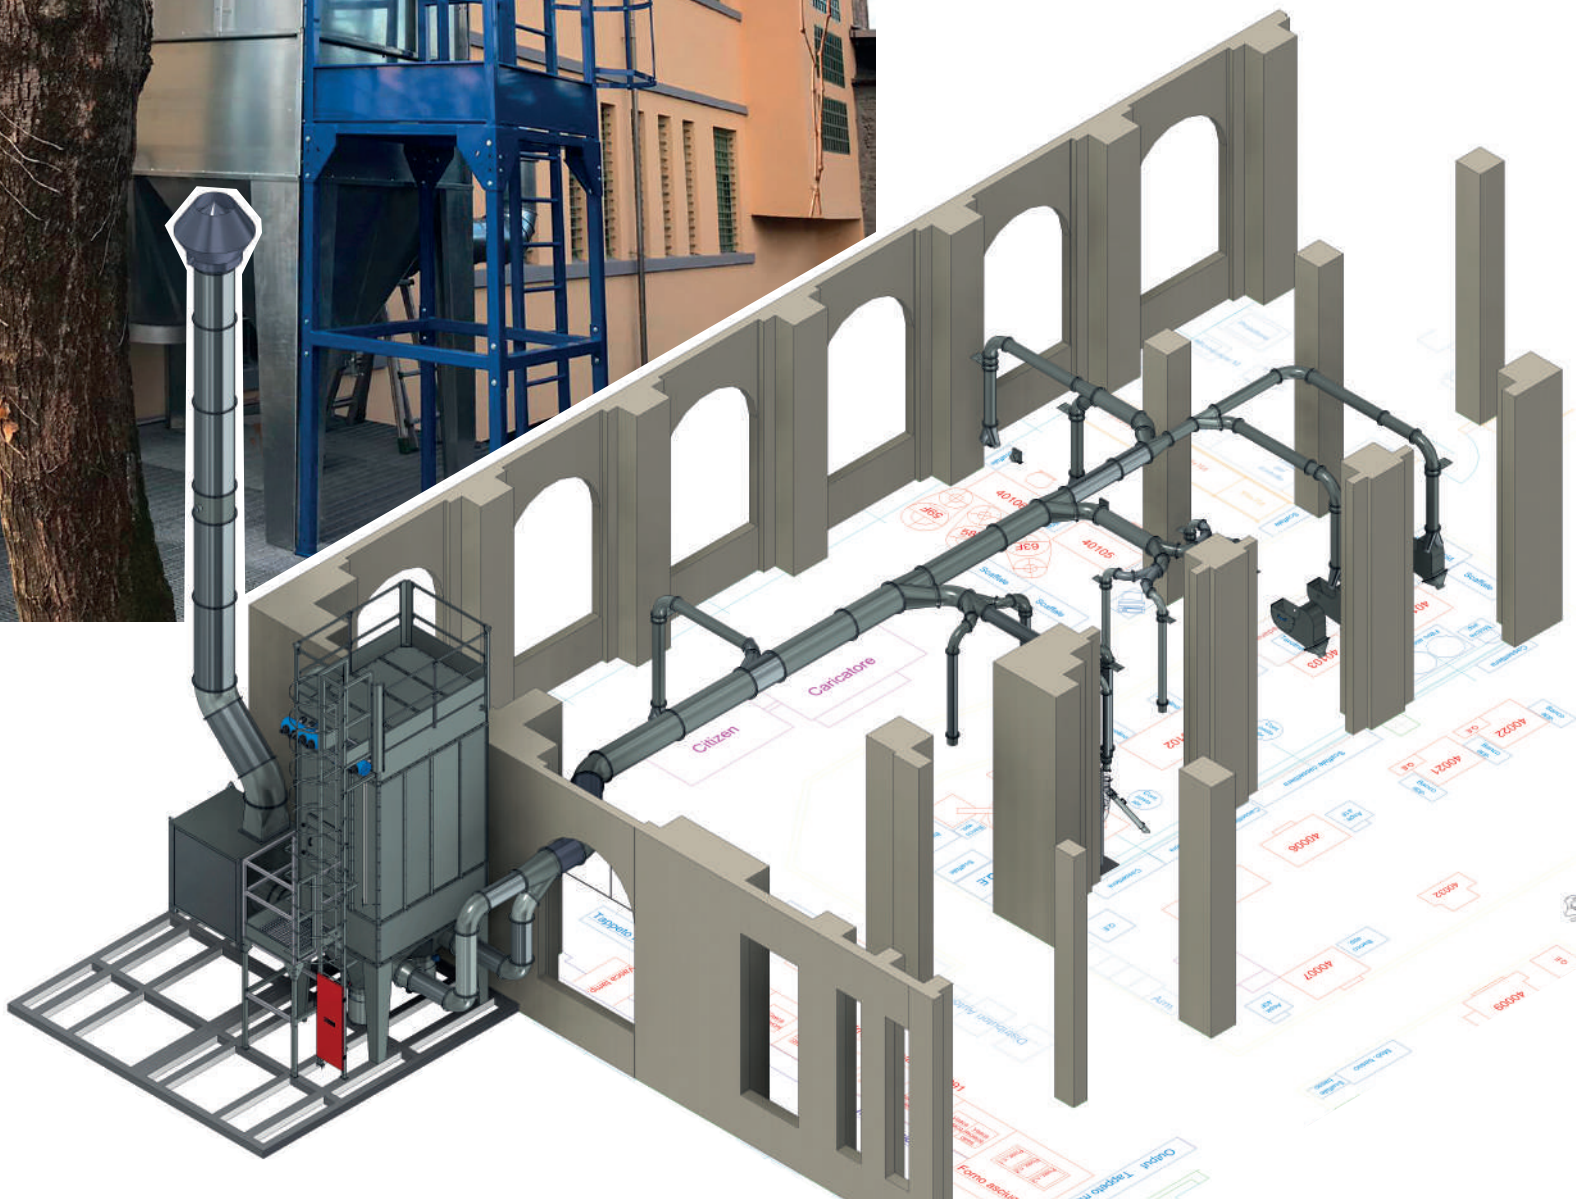


Caricatore
Crizen

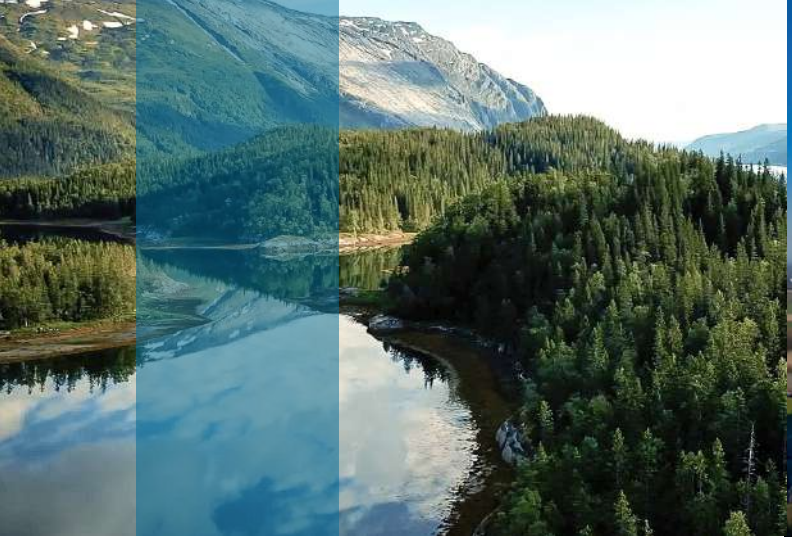



Coral USA

Coral USA provides innovative fume extraction and dust collection solutions for industrial applications.
With decades of experience, Coral combines technical expertise, reliable performance, and a strong commitment to helping you maintain a safer, cleaner, and more productive workplace.

Based in Texas, we're ready to support your business with advanced solutions, responsive service, and ready-to-ship inventory.

CORAL
Innovative Air Solutions USA

CORAL USA CORP.
19121 Marketplace Avenue, Bldg. 1 Suite 165
KYLE, TX 78640,
USA

p.: +1 480 796 5352
e.: info@coralusa.com

coralusa.com

For a cleaner future.

Graphic design: -CORAL USA CORP. KYLE TX USA 2026 / rev. 0